

# **Product Preview**

PP/7164/07 March 2017

# **CMX7164**

## Multi-mode Wireless Data Modem IC

GMSK/GFSK · 2/4/8/16 FSK · 4/16/32/64 QAM · V.23



The CMX7164 is a Multi-mode Wireless Data Modem that supports multiple modulation schemes and coding systems, all configurable under host control. Adaptive Coded Modulation (ACM) features allow modulation type and block format to be changed on the fly to dynamically select data block size, coding rate and CRC size.

#### **Features**

- Supports multiple modulation schemes
  - GMSK/GFSK
  - 2/4/8/16-FSK
  - 4/16//32/64-QAM
  - V.23
- Adaptive Coded Modulation (ACM)
- High-performance I/Q radio interface
- Direct connection to zero IF receiver/transceiver
- Reconfigurable digital IF filters
- Supports multiple RF channel spacings
- Deviation control without manual trim (Tx)
- I/Q trimming
- Serial bus (C-BUS) controlled
- Read/write 128-byte FIFOs and data buffers streamline transfers and relax host service latency

### **Applications**


- High-performance narrowband data radio
  - Telemetry/SCADA/M2M data modems
  - Satellite communications
  - 6.25kHz to 25kHz channels
  - ETSI, FCC, ARIB compliant
  - FCC part 90 spectral efficiency requirements
- Software Defined Radio (SDR)
- High-speed wireless data

	Y	,			CH.	Treat	Town of the state	Treats (
						Small V	QFN /LQFP	Packages
	RF Rx	RF Tx						
		人						
	ADC	DAC						
	Digital Filters	Digital Filters	tion	S.				
	Mode	em	Configuration	Registers	•	C-BUS	Host μC	
	Modulate	Coding						
	Modulation Function		Pow cont	I.	•	3.0 – 3.6	V	
	Aux 4 x ADC 4		Aux x DAC					
	Aux 4 x GPIO	Aux 2 x CLK Synth		th				
		C-BUS/SPImaster		er	•		•	
CMX7164 Multi-mode Modem								


Function Image™	Modulation	Bits/Symbol	Symbol Rate (symbols/s)
7164FI-1.x	GMSK/GFSK	1	2,000 to 20,000
7164FI-2.x	2-FSK, 4-FSK 8-FSK, 16-FSK	1, 2, 3 or 4	2,000 to 10,000
7164FI-4.x	4-QAM, 16-QAM 32-QAM, 64-QAM	2, 4, 5 or 6	2,000 to 20,000
7164FI-6.x	V.23 Modem	1	1,200

## **CMX7164 Advantage**

- No external codecs or DSP processing required
- Provides a complete modem function, data to modulated signal and analogue signal to data
- Ensures the highest performance and multi-modulation operation
- Combining the CMX7164 with CML's RF devices ensures the highest integration solution
- ACM features support an efficient, flexible and robust over-air protocol/coding system
- FirmASIC® component technology provides maximum flexibility and a platform for custom modulation schemes



## **Evaluation / Demonstration**

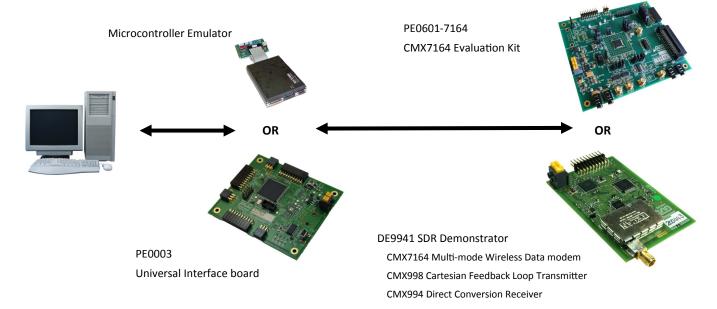



## **CML Microcircuits Benefits**

#### Faster time to market

Developing proven high performance and field tested ASSP ICs, CML is helping engineers to cope with increasing pressure in delivering shorter project design cycles.

#### **Design flexibility**

CML's  $FirmASIC^{\otimes}$  reconfigurable technology with the use of a Function Image<sup>TM</sup> upload enables a single hardware platform to be used for multiple communications systems.

#### **High Quality**

With 100% of products being tested before shipping, customers are assured of the highest reliability.

### **Product Longevity**

CML's product enjoys a long lifespan. Designing with CML, manufacturers are rewarded with longer product life cycles and a stable BOM, ensuring minimum engineering costs and maximum profit.

#### **Low Power**

Being at the forefront of low power chip technology, manufacturers can develop smaller equipment with extended battery life.

#### **Superior Support**

Internal and field based applications teams worldwide provide focused customer support to ease the development process.

WHAT TO DO NEXT

Download: <u>Datasheet</u>

Find: Distributor

## www.cmlmicro.com

United Kingdom United States Singapore Tel: +44 (0) 1621 875500 Tel: +1 336 744 5050 Tel: +65 62888129

email: sales@cmlmicro.com email: us.sales@cmlmicro.com email: sg.sales@cmlmicro.com